



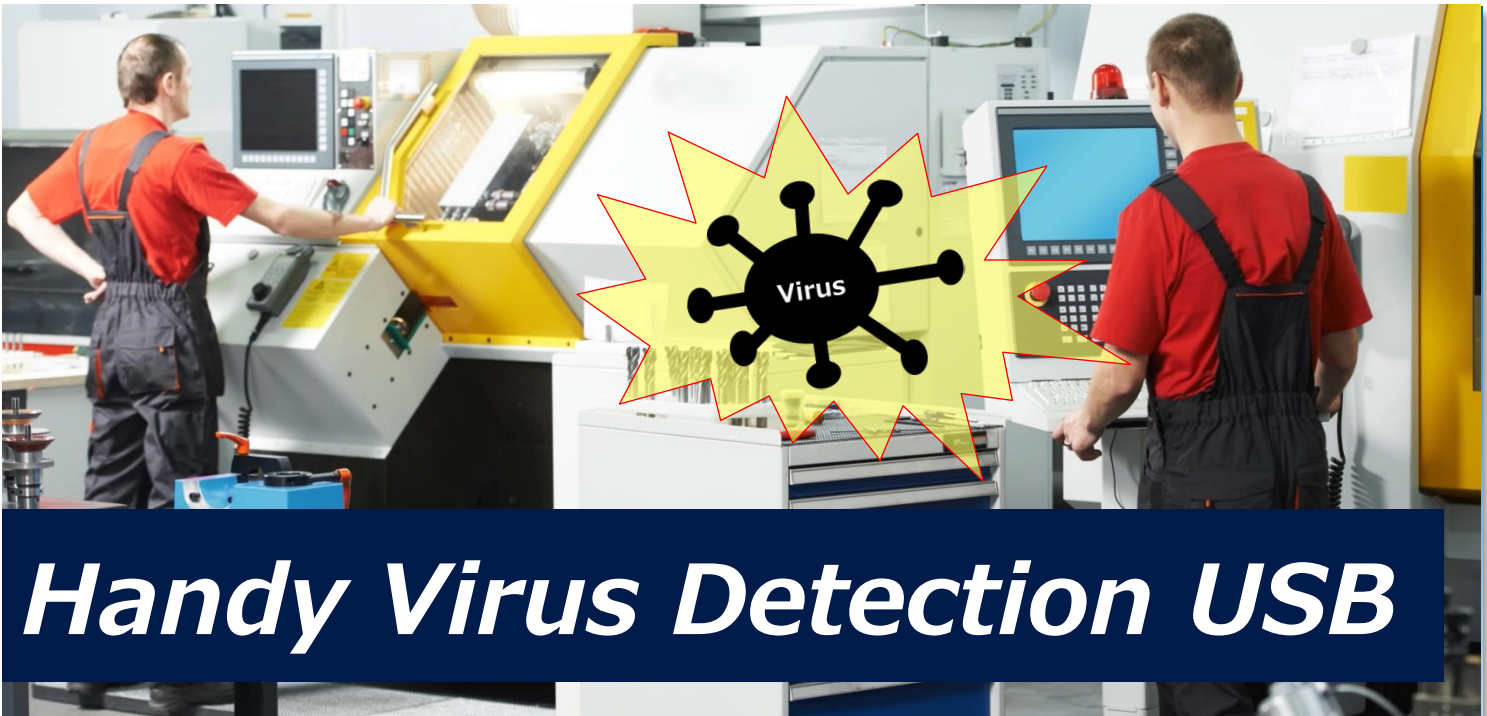

## Handy Virus Detection USB

*You can detect viruses easily.*

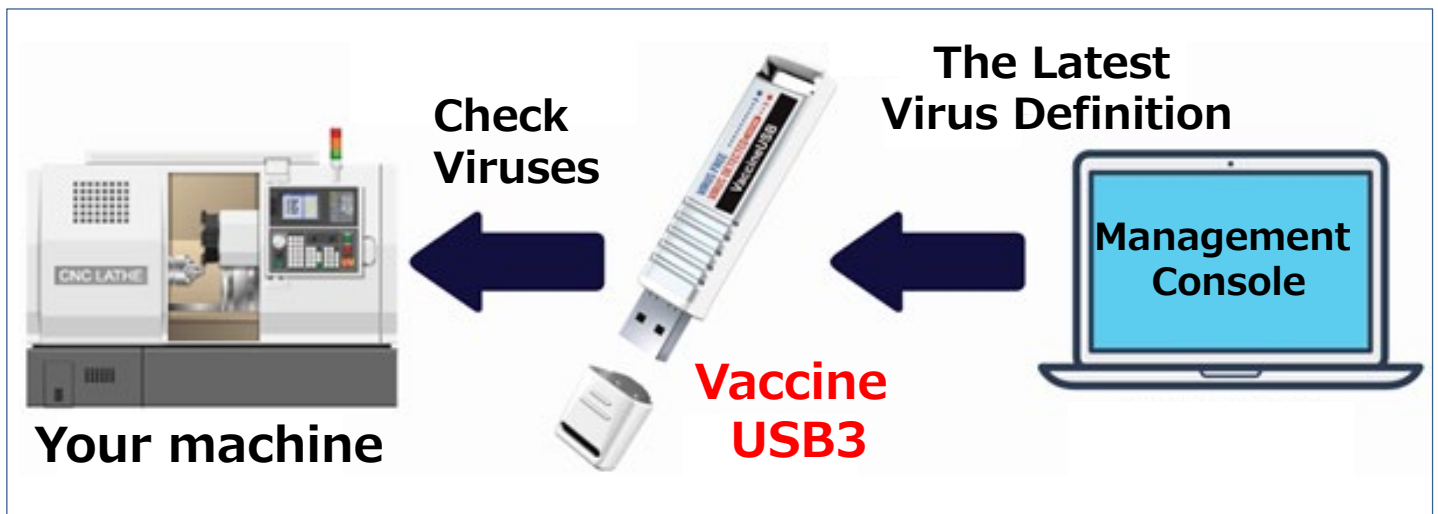

### No Viruses



### Detected Viruses



| Blue LED | Red LED  | Status           |
|----------|----------|------------------|
| Flashing | Flashing | Scan in progress |
| On       | Off      | No viruses       |
| Off      | On       | Detected viruses |
| Off      | Flashing | Error            |

# Specifications & Requirement

| Vaccine<br>USB3 | PN                          | ULD-VAU31A                                                                                                                                                                                                           | ULD-VAU33A | ULD-VAU35A |
|-----------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|
|                 | License                     | 1 year                                                                                                                                                                                                               | 3 years    | 5 years    |
|                 | Interface                   | USB1.1(Full Speed)/<br>USB 2.0(High Speed/Full Speed)                                                                                                                                                                |            |            |
|                 | Maximum<br>current          | Scanning: 220 mA                                                                                                                                                                                                     |            |            |
|                 |                             | Standby: 140 mA                                                                                                                                                                                                      |            |            |
|                 | Operating<br>temperature    | 0 to 50°C                                                                                                                                                                                                            |            |            |
|                 | Operating<br>humidity       | 30 - 80 % *non-condensing                                                                                                                                                                                            |            |            |
|                 | Certificates                | VCCI Class B, CE, FCC                                                                                                                                                                                                |            |            |
|                 | Weight                      | 11g                                                                                                                                                                                                                  |            |            |
|                 | Dimensions<br>*With a cover | L 79.0 mm x W 18.0 mm x H 9.4 mm                                                                                                                                                                                     |            |            |
|                 | 1 year license<br>extension | PN: ULD-VAU31LRA for 1 pc<br>PN: ULD-VAU310LR for 10 pcs                                                                                                                                                             |            |            |
|                 | Language                    | English *Depends on Windows Language(English)                                                                                                                                                                        |            |            |
| Computers       | Hardware                    | DOS/V computer with USB port<br>Free memory: more than 512 MB<br>(recommended 1GB)                                                                                                                                   |            |            |
|                 | Settings                    | Page cash ON (recommended)<br>CD-ROM drive recognition (recommended)<br>CD-ROM Auto-run (recommended)                                                                                                                |            |            |
|                 | OS                          | Windows 7, Windows 8, Windows 8.1, Windows 10,<br>Windows Server 2008 (SP2),<br>Windows Server 2008 R2,<br>Windows Server 2012, Windows Server 2016,<br>Windows Embedded Standard 7,<br>Windows Embedded POS Ready 7 |            |            |
|                 | Permission<br>requirement   | Administrators, Restricted users                                                                                                                                                                                     |            |            |
|                 | Screen<br>resolution        | 640 x 480 and more (Less than 800 x 600)                                                                                                                                                                             |            |            |



Hagiwara Solutions Co., Ltd.

**Shinobu Apostol ITO**  
Global marketing manager  
[Shinobu\\_Ito@hagisol.co.jp](mailto:Shinobu_Ito@hagisol.co.jp)  
Mobile: +81 80 2455 3408

■ Tokyo office  
2F, Kudan First Place, 4-1-28,  
Kudankita, Chiyoda-ku, Tokyo,  
Japan, 102-0073  
Landline: +81-3-3556-5016

<http://www.hagisol.com>

HSS20026-A01

- The company names and product names noted herein are trademarks or registered trademarks.
- The content of this catalog is subject to change without notice due to development and other factors.
- Hagiwara Solutions is not responsible for any loss or damage that may be incurred based to the content of this catalog.

■ Partner: